


ACCESSORY

Cable grommet black

Sleeve that protects the cable where it passes through a ceiling tile or an island: the edge cannot cut the cable and the hole is hidden.

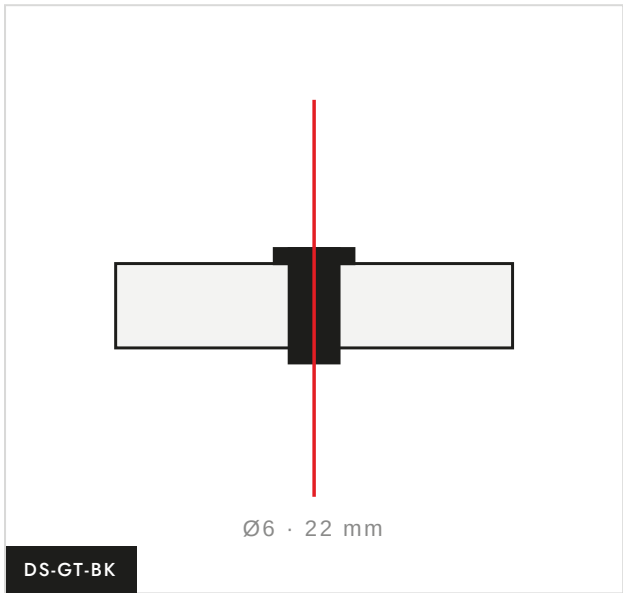

TECHNICAL DATA

|             |               |
|-------------|---------------|
| Dimensions  | Ø6 × 22 mm    |
| Cable range | Ø1.0 – 2.0 mm |
| Material    | Polyamide     |
| Finishes    | Black         |

INSTALLATION

- 1 Drill the tile or island with a 6 mm bit.
- 2 Press the grommet in until the flange sits flush.
- 3 Thread the cable: it is protected from the edge through the full thickness.

ORDER CODE

DS-GT-BK

Sold separately

DSUSPEND LABORATORY TESTS

|                         |                               |
|-------------------------|-------------------------------|
| Tensile test to failure | <input type="radio"/> PENDING |
| Slip under load         | <input type="radio"/> PENDING |
| Salt spray ISO 9227     | <input type="radio"/> PENDING |
| Adjustment cycles       | <input type="radio"/> PENDING |

SAFETY



Static loads only



No chlorine or corrosive areas



No grease or lubricants



Never use frayed cable



Maximum 60° inclination



Do not paint components

Provisional document: data will be completed with our laboratory tests. Images for reference only. Data subject to change without notice.