


SUSPENSION KIT

Magnetic kit

Drill-free kit for steel ceilings and structures: neodymium magnet with M6 thread, cable and panel fixing.

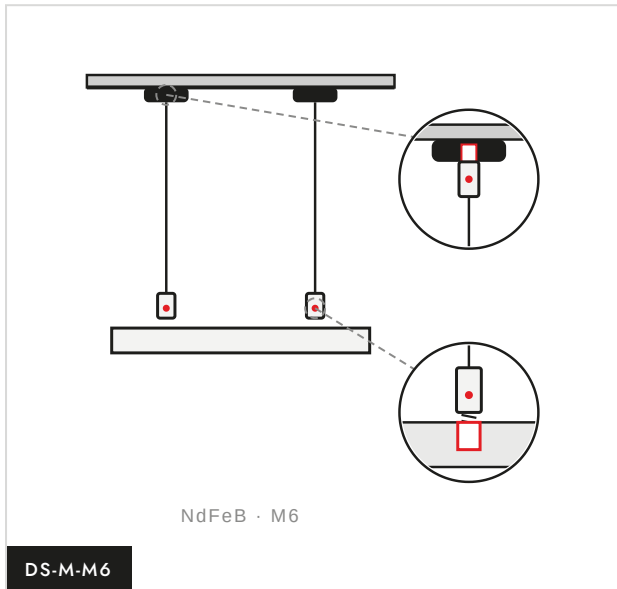

TECHNICAL DATA

Cable	7x7 galvanised steel · optional clear sheath
Cable range	Ø1.5 mm
Material	Neodymium magnet with rubber jacket and M6 threaded bush
Thread / fixing	M6
Working load	Pending test
Cable length	2000 mm from stock · other lengths made to measure in Mataró
Finishes	White (WH) · black (BK)
Supply	Assembled and labelled · box of 8 kits

INSTALLATION

1

Clean the steel and place the magnet gradually, without impact.

2

Measure the actual force on site with a force gauge; the working load is at most 1/5 of that value.

3

Above walkways, add a safety cable to an independent point.

KIT CONTENTS

ITEM	CODE	DESCRIPTION	QTY
1	DS-MR43	Rubber magnet Ø43 mm	1
2	DS-C15	7x7 cable Ø1.5 mm	1
3	DS-G-M6	M6 gripper	1

ORDER CODE

DS-M-M6-15-2000-WH

series · fixing · cable Ø · length mm · finish
NI nickel · BK black · WH white

DSUSPEND LABORATORY TESTS

Tensile test to failure	☐ PENDING
Slip under load	☐ PENDING
Salt spray ISO 9227	☐ PENDING
Adjustment cycles	☐ PENDING

SAFETY



Static loads only



No chlorine or corrosive areas



No grease or lubricants



Never use frayed cable



Maximum 60° inclination



Do not paint components

Provisional document: data will be completed with our laboratory tests. Images for reference only. Data subject to change without notice.