


SUSPENSION KIT

Magnetic baffle kit

Vertical PET baffles hung from a steel ceiling or structure without drilling: rubber-jacketed magnet, cable and U-clip for 18 to 24 mm.

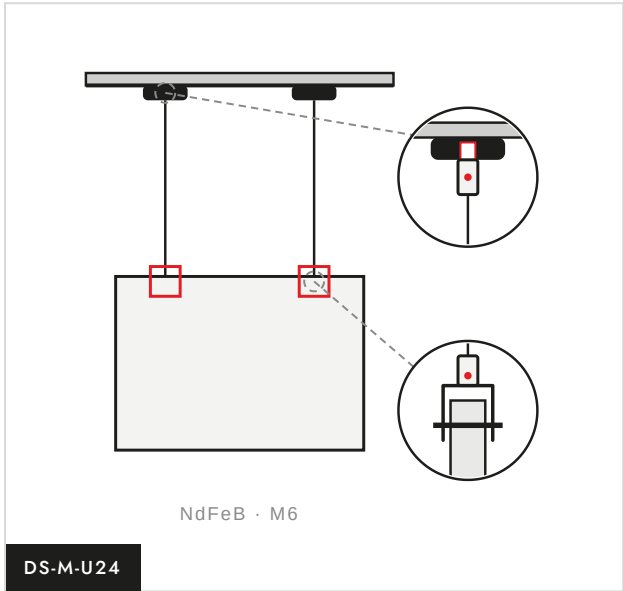

TECHNICAL DATA

Cable	7x7 galvanised steel · optional clear sheath
Cable range	Ø1.5 mm
Panel thickness	18 – 24 mm
Material	Neodymium magnet with rubber jacket and M6 threaded bush
Thread / fixing	M6
Working load	Pending test
Cable length	2000 mm from stock · other lengths made to measure in Mataró
Finishes	White (WH) · black (BK)
Supply	Assembled and labelled · box of 8 kits

INSTALLATION

1
Clean the steel and place the magnet gradually, without impact.

2
Measure the actual force on site with a force gauge; the working load is at most 1/5 of that value.

3
Above walkways, add a safety cable to an independent point.

KIT CONTENTS

ITEM	CODE	DESCRIPTION	QTY
1	DS-MR43	Rubber magnet Ø43 mm	1
2	DS-C15	7x7 cable Ø1.5 mm	1
3	DS-U24	U-clip 24 mm	1

ORDER CODE


DS-M-U24-15-2000-WH

series · fixing · cable Ø · length mm · finish
NI nickel · BK black · WH white

DSUSPEND LABORATORY TESTS

Tensile test to failure	☐ PENDING
Slip under load	☐ PENDING
Salt spray ISO 9227	☐ PENDING
Adjustment cycles	☐ PENDING

SAFETY

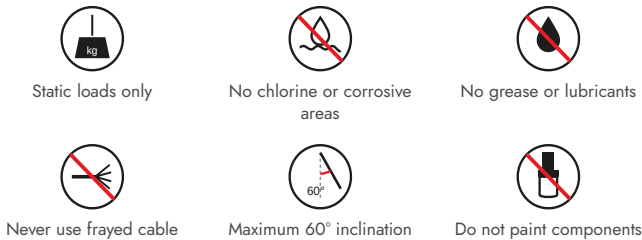

Provisional document: data will be completed with our laboratory tests. Images for reference only. Data subject to change without notice.