ACCESSORY

Magnet Ø42 mm

Ø42 mm neodymium pot magnet, drilled for a screw.

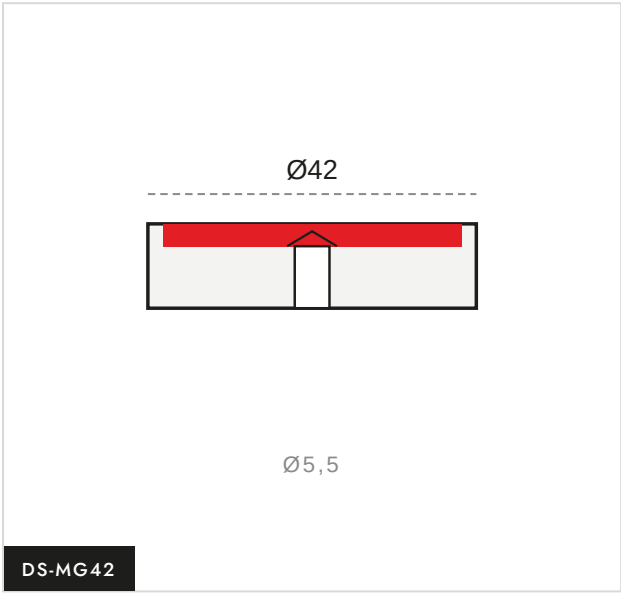

TECHNICAL DATA

Dimensions	**Ø42 mm**
Thread / fixing	**Countersunk hole Ø5.5**
Material	**Neodymium magnet in steel cup**
Finishes	**Nickel**
Working load	**Pending test**

INSTALLATION

1
Clean the steel and place the magnet gradually, without impact.

2
Measure the actual force on site with a force gauge; the working load is at most 1/5 of that value.

3
Above walkways, add a safety cable to an independent point.

ORDER CODE

DS-MG42-NI

Sold separately

DSUSPEND LABORATORY TESTS

Tensile test to failure	○ PENDING
Slip under load	○ PENDING
Salt spray ISO 9227	○ PENDING
Adjustment cycles	○ PENDING

SAFETY

Static loads only

No chlorine or corrosive areas

No grease or lubricants

Never use frayed cable

Maximum 60° inclination

Do not paint components

Provisional document: data will be completed with our laboratory tests. Images for reference only. Data subject to change without notice.