


ACCESSORY

Rubber magnet Ø66 mm

Flat Ø66 mm magnetic system with a rubber jacket that does not scratch or mark, and an M6 threaded bush to screw the gripper or an eye bolt straight in.

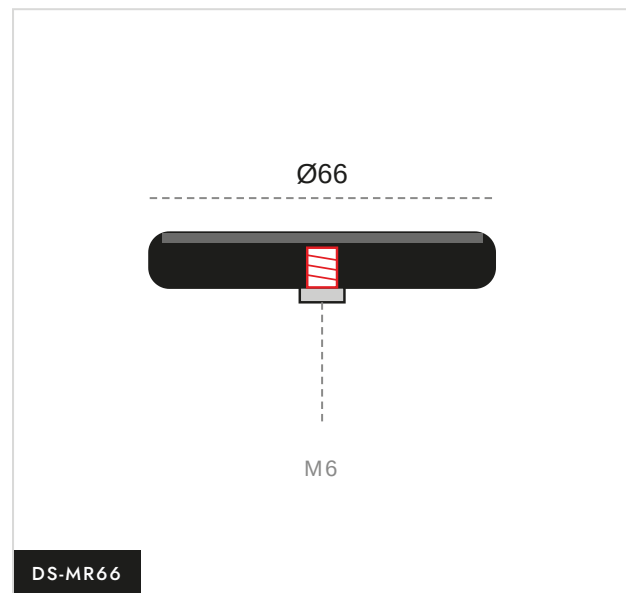

TECHNICAL DATA

Dimensions	Ø66 × 8.5 mm
Thread / fixing	M6 female
Material	Neodymium magnet with rubber jacket and M6 threaded bush
Finishes	White (WH) · black (BK)
Working load	Pending test

INSTALLATION

- 1 Clean the steel and place the magnet gradually, without impact.
- 2 Measure the actual force on site with a force gauge; the working load is at most 1/5 of that value.
- 3 Above walkways, add a safety cable to an independent point.

ORDER CODE

DS-MR66-WH|BK

Sold separately

DSUSPEND LABORATORY TESTS

Tensile test to failure	☐ PENDING
Slip under load	☐ PENDING
Salt spray ISO 9227	☐ PENDING
Adjustment cycles	☐ PENDING

SAFETY



Static loads only



No chlorine or corrosive areas



No grease or lubricants



Never use frayed cable



Maximum 60° inclination



Do not paint components

Provisional document: data will be completed with our laboratory tests. Images for reference only. Data subject to change without notice.